





LED ROADWAY LIGHTING LUMINAIRE

"EDGE"

BRTFG 120W LED

TOP ACCESS TO DRIVER

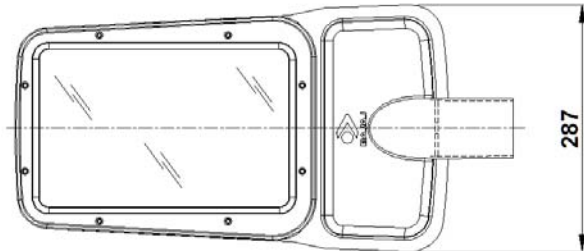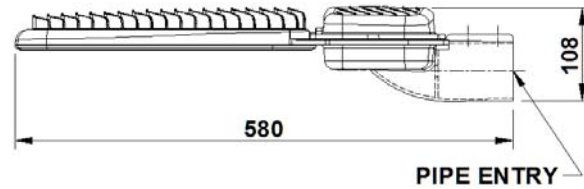

NOMINAL DIMENSIONS IN mm Tolerance +/-5

Application

- Arterial roads,
- Main roads,
- Multi-level junctions,
- Traffic round-about,
- Civic centers. etc.

Specification

- Epoxy powder coated (RAL7024) pressure die-cast aluminium housing with weatherproof gasket for LEDs and control gear compartments.
- Pressure die-cast aluminium frame with heat resistant toughened clear glass fixed with SS screws.
- LED specification – make – CREE LED / Equivalent  
Colour temp. – 5700 °K ± 300 °K
- Lens – make – LedLink / Equivalent
- Driver has protection against lightning, over voltage & short circuit.
- Side entry mounting for 50 to 60 mm OD pipe bracket.
- Top maintenance – Access to driver is from the top.
- Ingress protection : IP66

Electrical Data

Product Code	Cat. Ref.	Input Voltage (V) AC	System Current (Amp.) @240V AC	System Wattage (W) AC	Power Factor
169553	BRTFG 120W LED	110 - 280	0.525	120	> 0.95

Data subject to variation due to change/improvement in the design, materials and processes.

<p><b>BAJAJ LUMINAIRE</b> Making the difference</p>	DRAWN	KPM	13-12-2013	FOR –
	CHECKED	SD		REV - 0 DATE-13-12-2013
	APPROVED	SC		DRG. No
	DATA SHEET RELEASED ON DT-			<b>BRTFG 120W LED - 001</b>
<b>BAJAJ ELECTRICALS LIMITED</b> 15/17, SANT SAVTA MARG, REAY ROAD, MUMBAI-400 010.				* E-mail : <a href="mailto:luminaires@bajajelectricals.com">luminaires@bajajelectricals.com</a>